


## CASE STUDY - Traditional Style Staircase, Buckinghamshire

Our client was refurbishing an old property into an open, light dwelling with a modern feel. Our staircase was to be situated between two walls and have a half landing platform positioned in front of a large window. It was decided the staircase should have glass infill panels in the balustrade and open risers to allow the maximum of light to pass through. The balustrade was continued horizontally along the half landing and at first floor level.

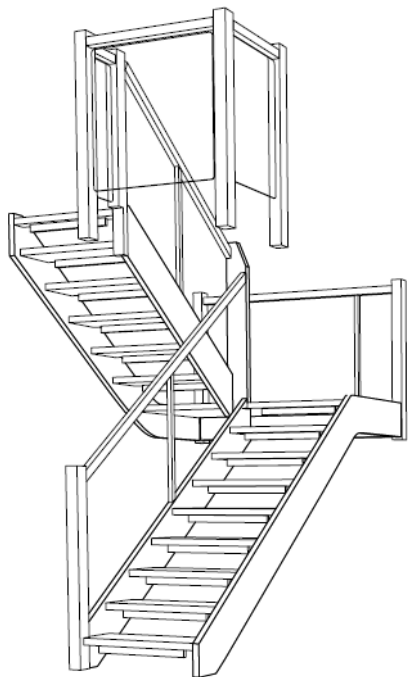

### TECHNICAL SPECIFICATION

FLOOR TO FLOOR HEIGHT	-	2756mm
RISERS	-	15 @ 183.7mm
GOING	-	220mm
TREAD WIDTH	-	860mm
TREADS	-	42mm Solid Maple
STRINGERS	-	42mm Solid Maple
NEWEL POSTS	-	80 x 80mm Maple (no. 1 in range)
HANDRAIL	-	no. 1 – Solid Maple
BALUSTRADE INFILL	-	8mm Toughened Glass Panels
MID LANDING	-	1806 x 818mm half platform

