


CASE STUDY - WF Staircase – Bude, Cornwall

This customer was undertaking a domestic refurbishment in Cornwall and part of the project was replacing and reconfiguring the staircase. The old closed riser model was ripped out and in its place was installed a light, modern WF system in Beech. This brought much needed light to the stairwell and gave the hallway below a much more open feel. This customer also opted for a curved internal handrail at the turn which emphasised the swoop of the stair. A small section of matching landing balustrade was also installed.

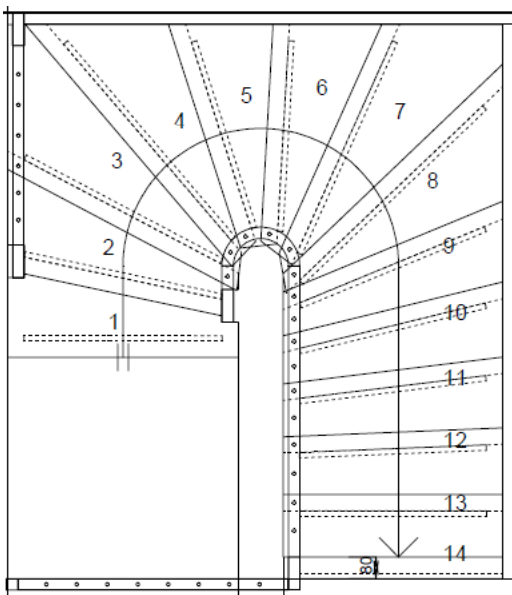

TECHNICAL SPECIFICATION

FLOOR TO FLOOR HEIGHT	-	2605mm
RISERS	-	13 @ 200.3mm
CLEAR TREAD WIDTH	-	900mm
TREADS	-	42mm Beech
STRINGER	-	42mm Beech Wall Stringer
HANDRAIL	-	WF Oak– 160 x 42mm
BALUSTRADE INFILL	-	13mm Stainless Steel Spindles
LANDING BALUSTRADE	-	965mm included

