

Slim

Slim is composed of 12, 13, 14 or 15 rises complete with railing. The maximum height of the staircase is 356 cm.

The handrail is composed of two metal elements.


The staircase is characterized by a landing which allows the staircases to be fitted to openings without a hole or with a square opening.

COLOURS AND FINISHES




STEEL COLOURS: CORTEN, RAL 9001 OFF WHITE, RAL 9003 COOL WHITE AND IRON GREY

COMPOSITION KIT

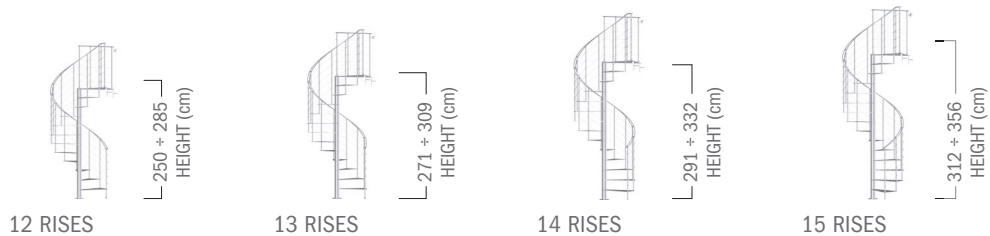

OPTIONAL BALUSTRADE SLIM 120 cm

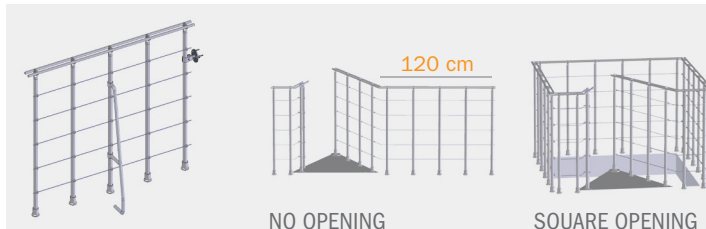

The **Slim** optional balustrade allows protecting the opening on the upper floor. It is composed of modular 120 cm modules, 5 balusters, bars, handrails and fixings.

OPTIONAL PROTECTION PANEL SLIM



This safety accessory can be applied to balustrades with horizontal elements to prevent children from climbing over them. It consists of a transparent shockproof polycarbonate panel 36 cm high and 68 cm long, which

can be shortened length-wise during the installation phase. The brackets are made of transparent polycarbonate. The following table can be used to calculate the number of elements to be ordered:

BALUSTRADE LENGTH	QUANTITY
from 0 to 120 cm	2
from 121 to 180 cm	3
from 181 to 236 cm	4
from 237 to 292 cm	5
from 293 to 348 cm	6
from 349 to 404 cm	7
from 405 to 460 cm	8
from 461 to 516 cm	9

OPTIONAL CHILD PROTECTION GATE



Kalypto is a safety accessory to prevent children under the age of 24 months from climbing up and down the stairs on their own. It is made up of a sheet stretched over a rigid tubular frame and plastic joints

to fasten the gate to the railing. It is 82 cm long and 73.5 cm high and can be shortened down to 54 cm to adapt to the staircase dimensions. Suitable for indoor use.

Optional **(a)**: The optional wall fitting allows installing Kalypto also where there are rigid walls (doors or corridors) or where there are no balusters to which to fit it.

Slim/Supplementary items

STEEL COLOUR	CORTEN	RAL 9001 OFF WHITE	RAL 9003 COOL WHITE	IRON GREY
BALUSTRADE SLIM 120 cm	K37013000	K37014000	K37015000	K37016000

Slim

STEEL COLOUR		CORTEN	RAL 9001 OFF WHITE	RAL 9003 COOL WHITE	IRON GREY
*HEIGHT 250 ÷ 285 cm	12 RISES	K37000000	K37002000	K37003000	K37004000
*HEIGHT 271 ÷ 309 cm	13 RISES	K37017000	K37018000	K37019000	K37020000
*HEIGHT 291 ÷ 332 cm	14 RISES	K37021000	K37022000	K37023000	K37024000
*HEIGHT 312 ÷ 356 cm	15 RISES	K37025000	K37026000	K37027000	K37028000



* If the height you measured appears in more than one row, we advise you to select the larger number of rises as this will make it more comfortable to walk up and down the stairs. Check that the number of rises selected fit in your stairwell referring to the plans.


Choose your rotation.

Slim

The configurations shown below will help you determine the direction of rotation and the starting point of the staircase based on the diameters and number of rises. The opening in the floor must be at least 5 cm larger than the diameter of the staircase. If the first tread from the bottom is not accessible, try (if possible) moving the landing point, or inverting the direction of rotation, or adding or removing rises.


12 RISES

∅ 130 cm

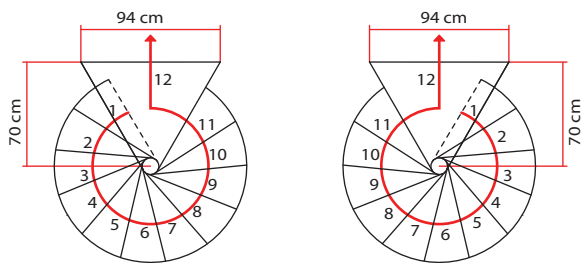


13 RISES

∅ 130 cm

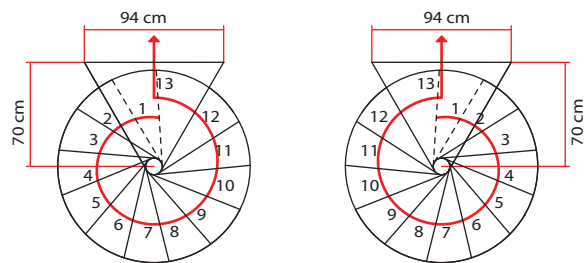

14 RISES

∅ 130 cm

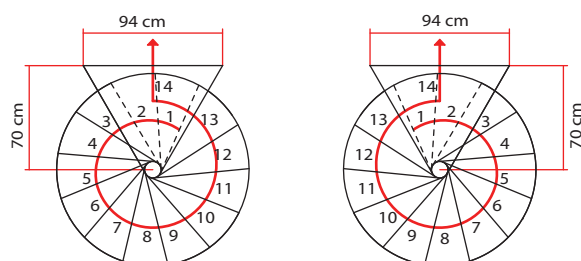

15 RISES

∅ 130 cm

