




W F F L O A T I N G S T A I R C A S E



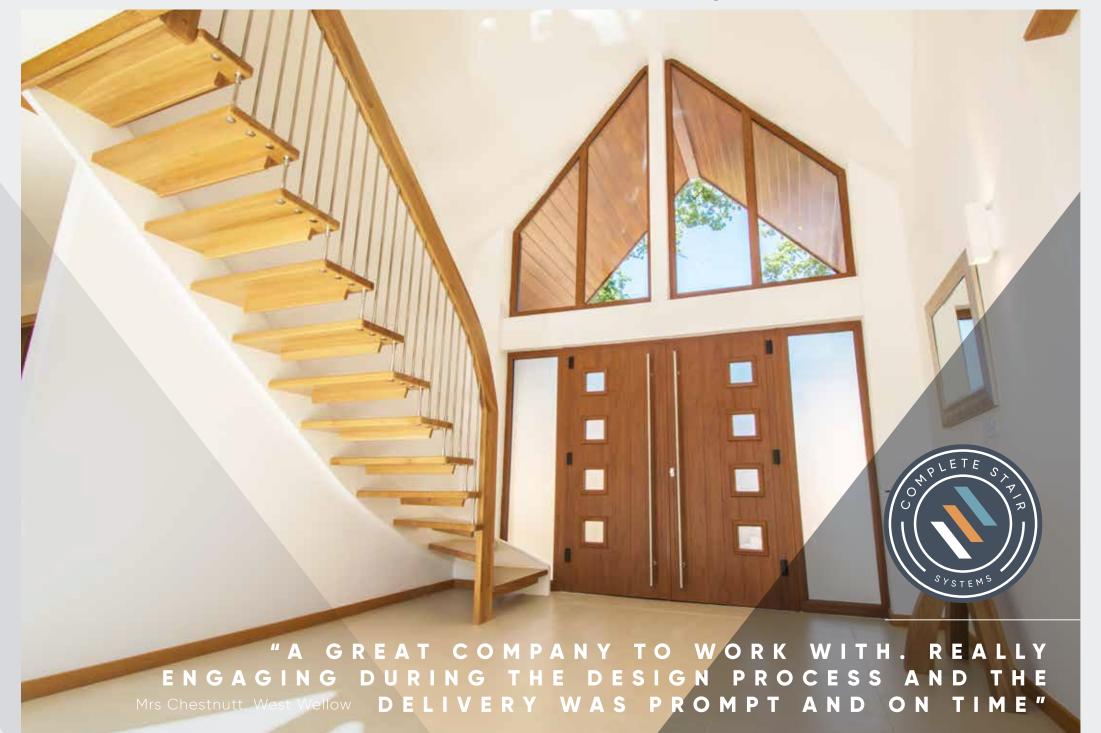

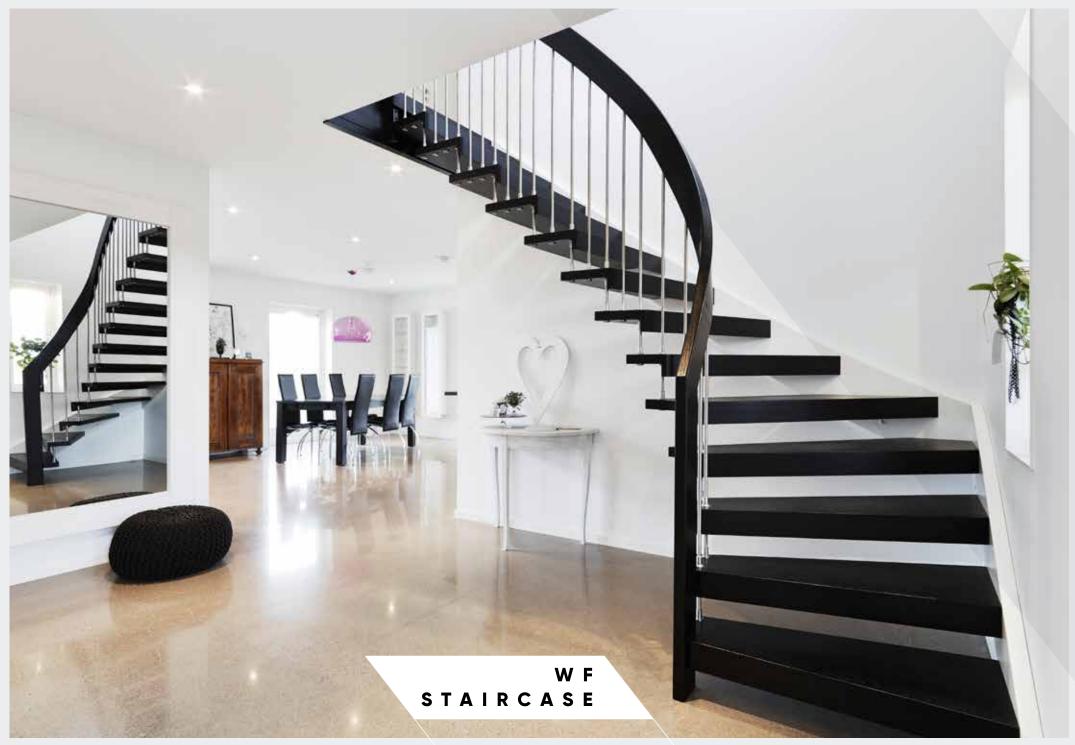

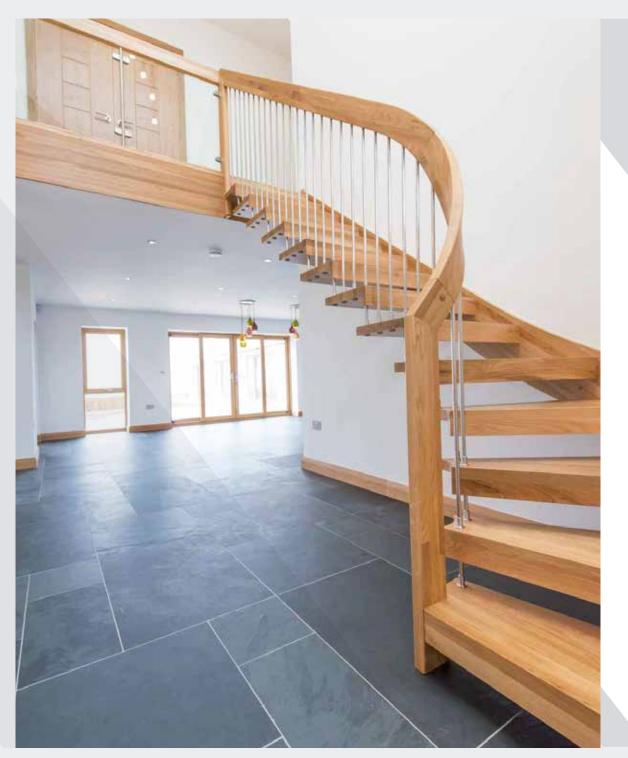















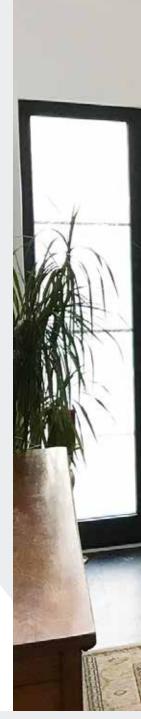

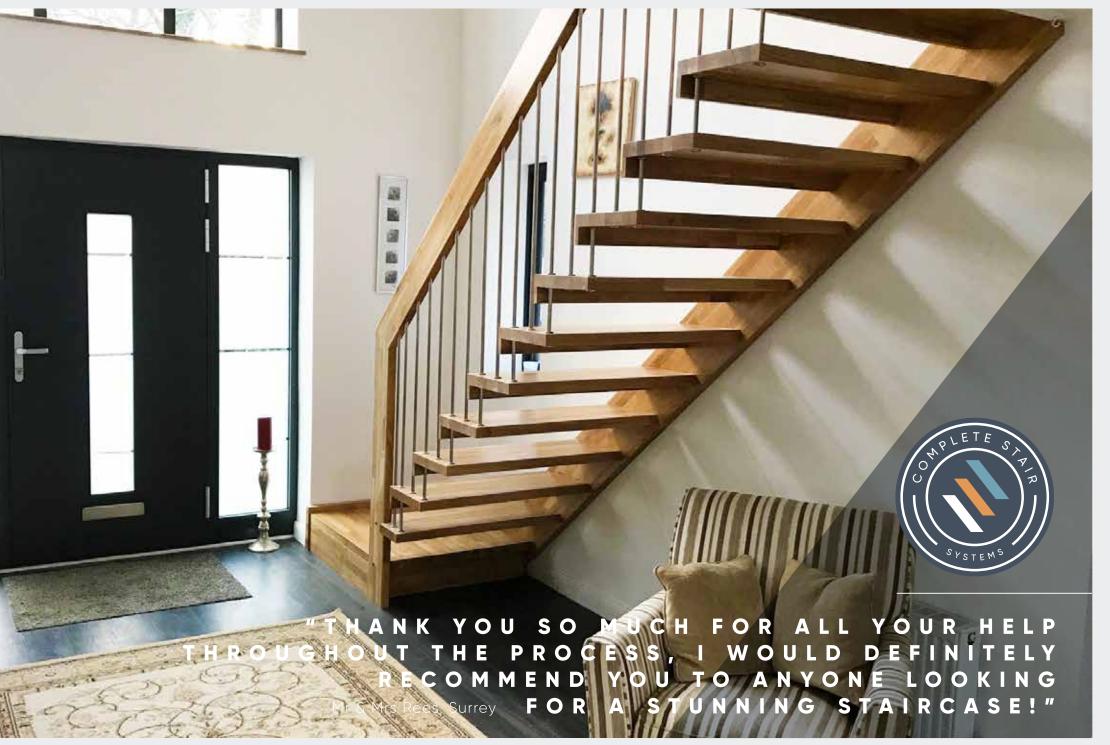











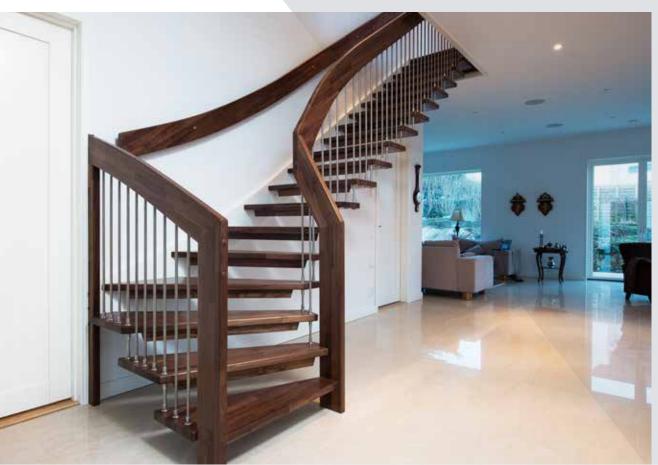

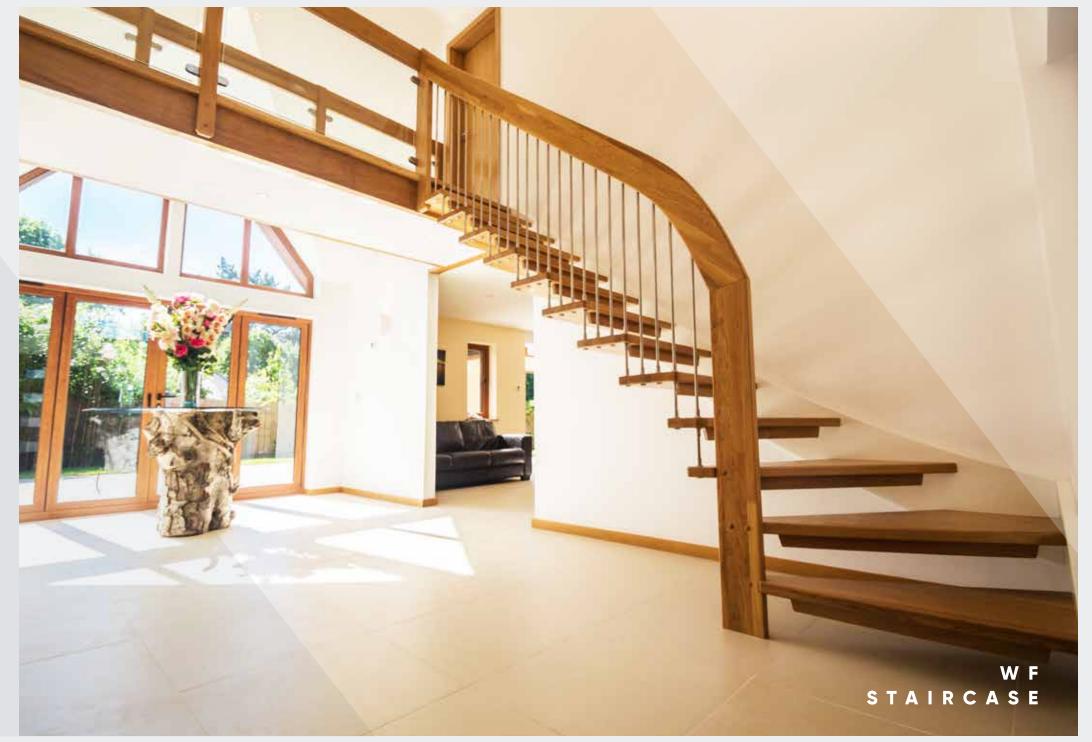

YOUR WF OATING STAIRCASE

OBTAINING A QUOTE

The model staircase is custom made so has to be priced on a individual basis. Given the vast range of materials and options and the variants of height and shape we need to know the following information to work out a price.

- Floor to floor height
- Shape of Staircase (straight / quarter turn / half turn)
- Landing balustrade required?
- Your choice of Tread

Please forward any relevant drawings and photos to info@completestairsystems.co.uk

TREAD OPTIONS

The WF staircase is supplied with 42mm solid timber treads and wall stringer. This model needs to be constructed in hardwood for strength. As standard the timber is formed with laminated blocks spanning the entire width glued together against the grain for strength and rigidity. With some timbers there is also an option to opt for the 'parquet' option. This option is still produced with solid timber but with much smaller blocks - very much like a parquet floor. This option is cheaper to produce an offers a large saving over the standard construction method.

Generally the timber is supplied factory finished oiled or with a natural lacquer varnish finish. They can also be supplied 'RAW' for finishing by others.












Walnut

Oak

Maple

Ash


Beech




Standard










Parquet

Quarter Turn

STANDARD FEATURES

For stability and regulation compliance there are several features included with every floating staircase.







160 x 42mm or 80 x 80mm newels



Stainless or Timber Spindles



Mini Riser Infills



Factory-Finishing

OPTIONAL FEATURES

To further personalise your custom floating staircase we offer the following options to enhance your staircase.



Non Slip Nosing



L Shaped Downstands



Landing Balustrade




Curved Corner Handrail

GUIDANCE FOR STRAIGHT STAIRCASES

STRAIGHT/QUATER/HALF TURN			
Main Stair		Secondary Stair	
Max Rise	220mm	Max Rise	220mm
Min Going	220mm	Min Going	220mm
N.B. Pitch line should not exceed 42 °		N.B. Pitch line should not exceed 42°	
Clear Tread Width	800mm*	Clear Tread Width	600mm

^{*} Building Regulation do not specify a clear tread width for straight stairs. Measurements are for guidance only.



VIEW THE
WF STAIR
IN OUR
SHOWROOM





01794 522444 info@completestairsystems.co.uk

www.completestairsystems.co.uk

Complete Stair Systems Ltd, Unit 15 Belbins Business Park, Cupernham Lane, Romsey, Hampshire, SO51 7JF