






CUSTOM MADE SPIRAL STAIRCASES

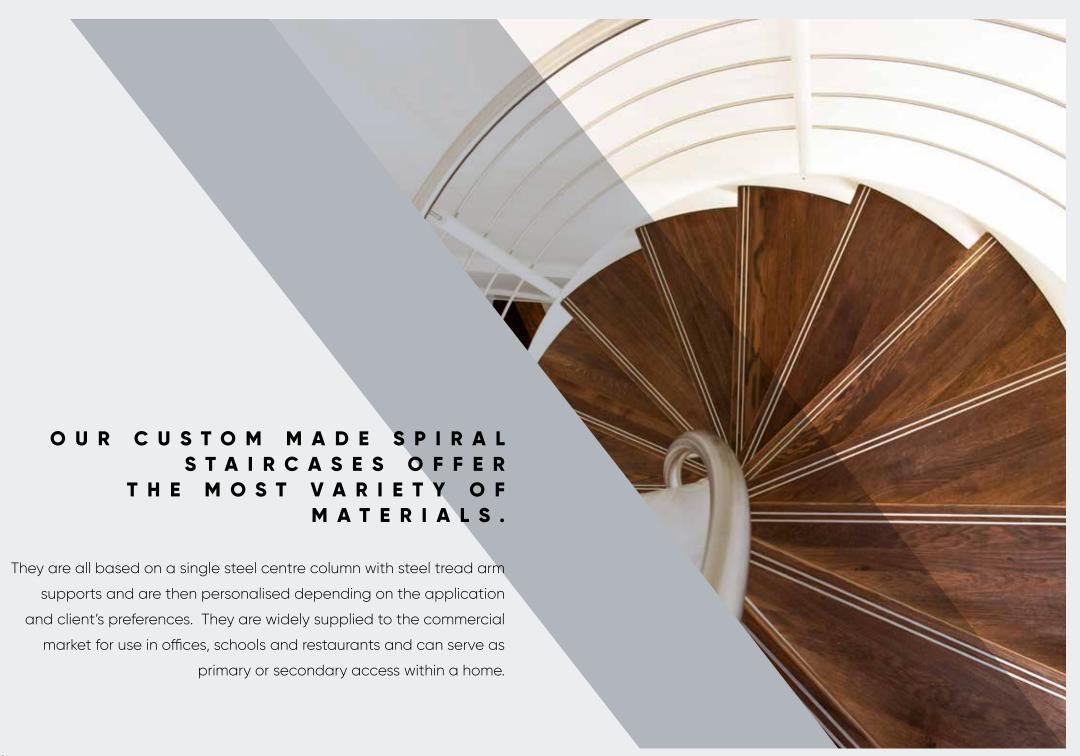


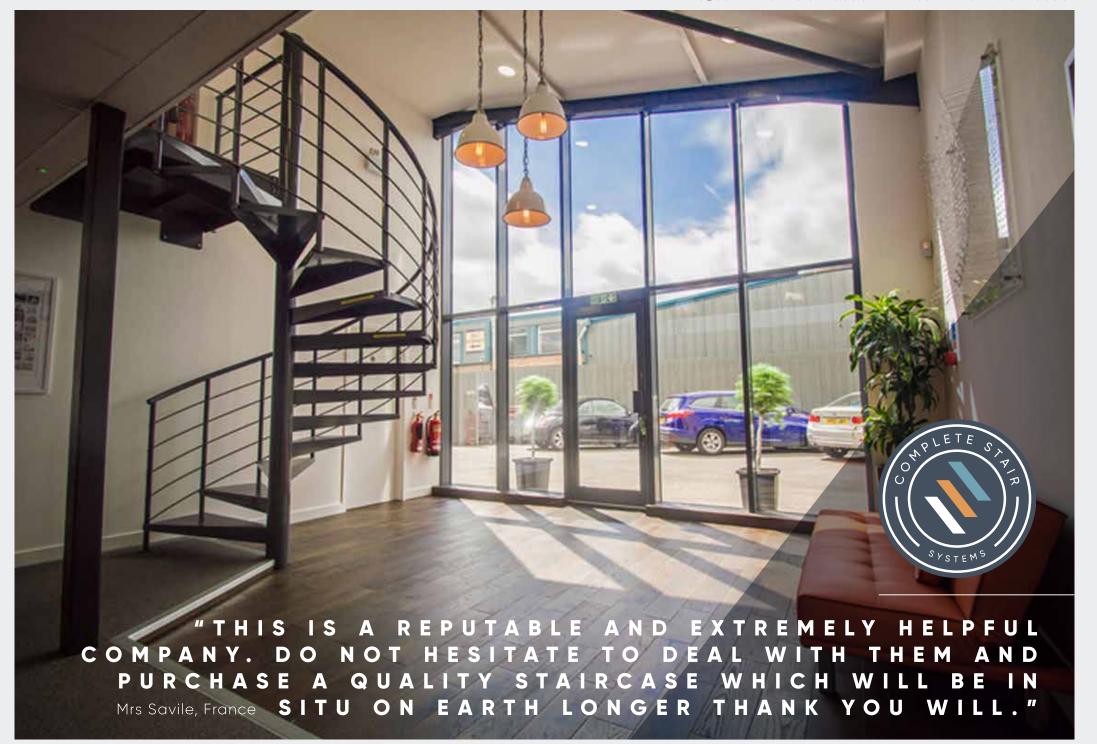


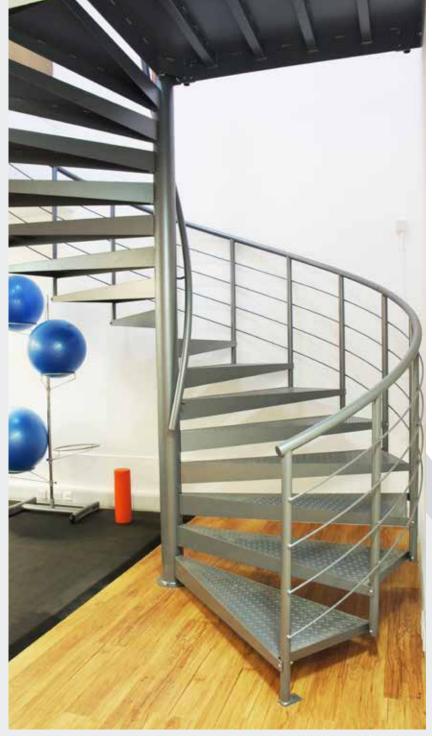


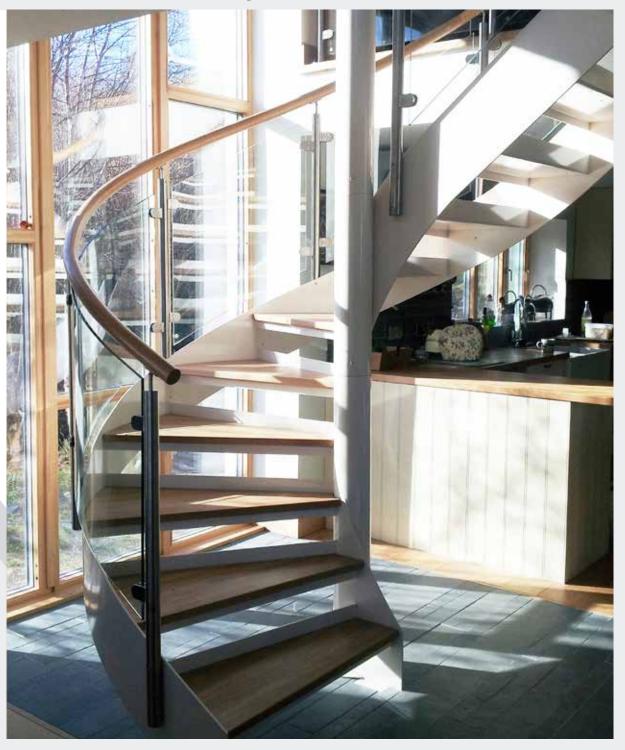

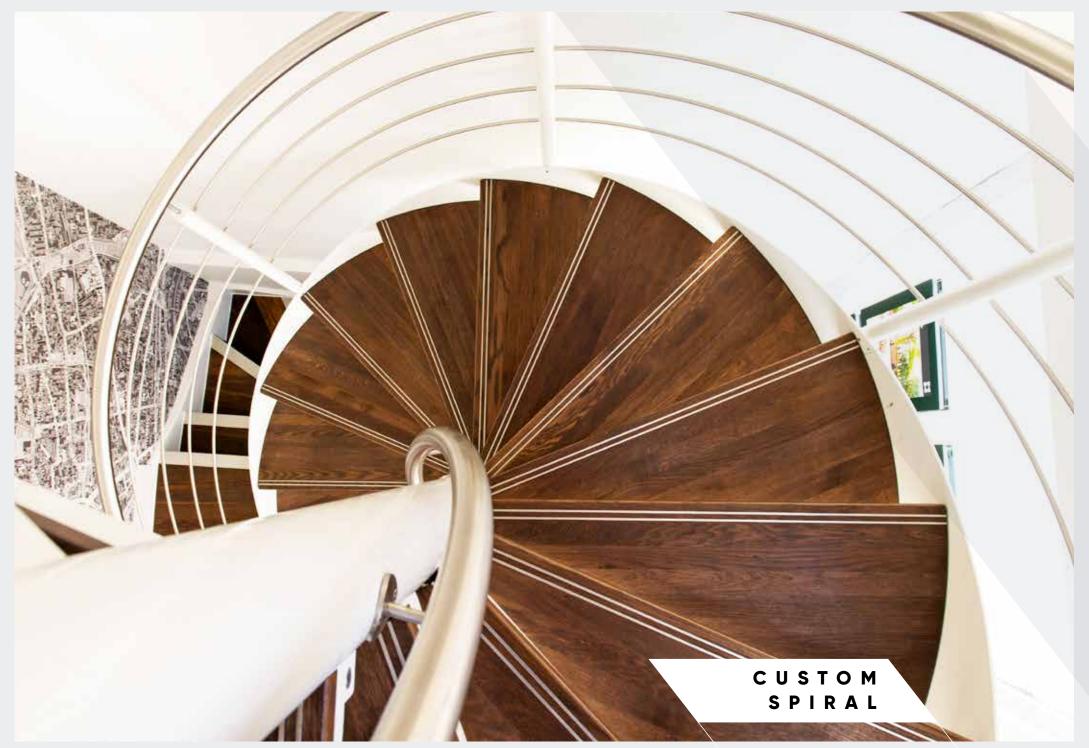

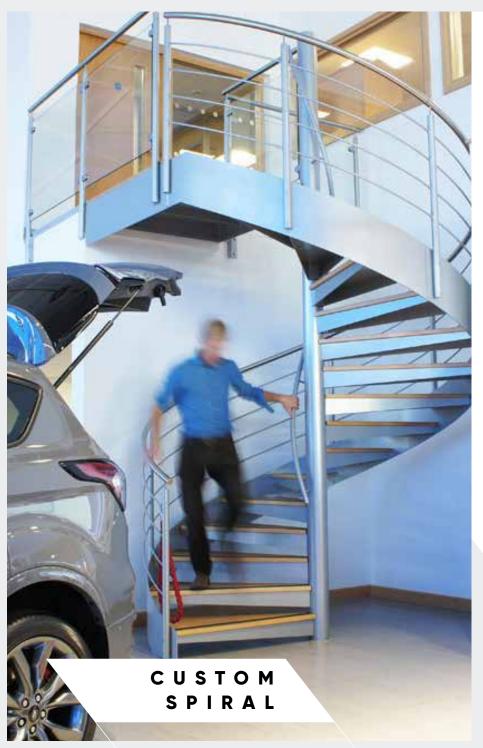


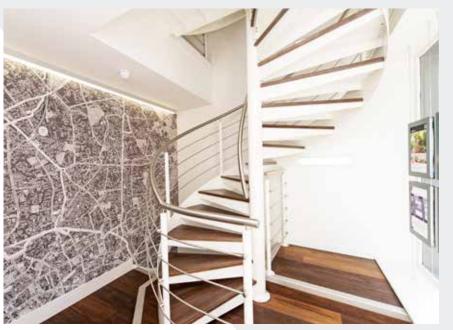


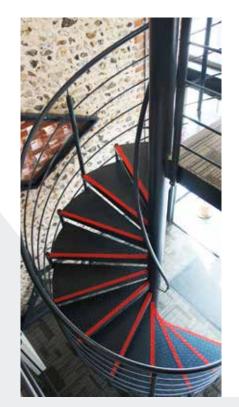





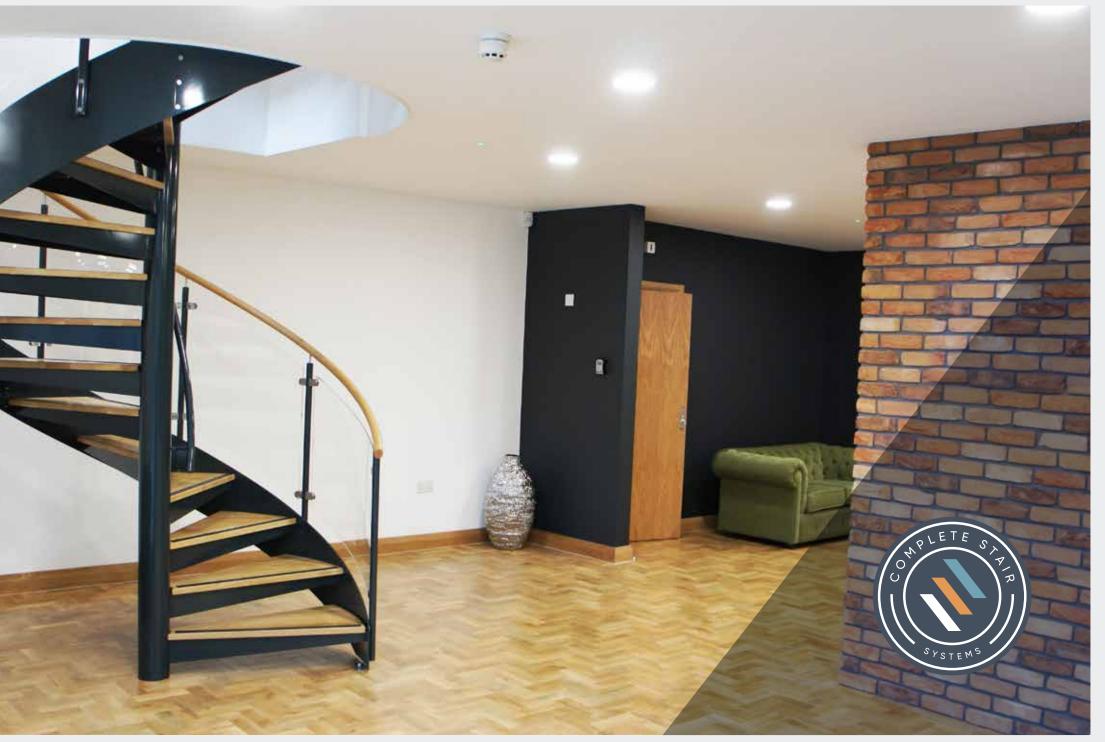

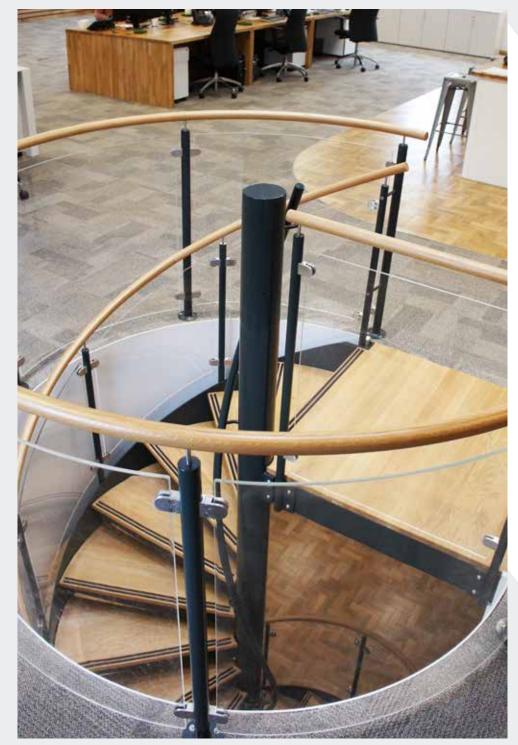













YOUR CUSTOM STAIRCASE

OBTAINING A QUOTE

This model is custom made so has to be priced on a individual basis. Given the vast range of materials and options and the variants of height and shape we need to know the following information to work out a price.

- Floor to floor height?
- Shape of Staircase (straight / quarter turn / half turn)?
- Landing balustrade required?
- Your choice of tread and balustrade?

Please forward any relevant drawings and photos to info@completestairsystems.co.uk

TREAD OPTIONS














Walnut

Maple


Ash

Beech

Glass



Oak







Non slip perforated

Steel grating

Chequer plate

Flat plate for topping

BALUSTRADE INFILLS









Standard 10mm spindles

Standard 10mm spindles with low rail

Standard 10mm spindles with separate handrail

Standard 10mm spindles with separate low rail

Welded handrail











One mid rail

Five mid rails

Separate handrail


Ten mid rails


Curved infill panels

Horizontal rails

TYPICAL SPIRAL STAIRCASE LAYOUT

STEEL WORK COLOURS

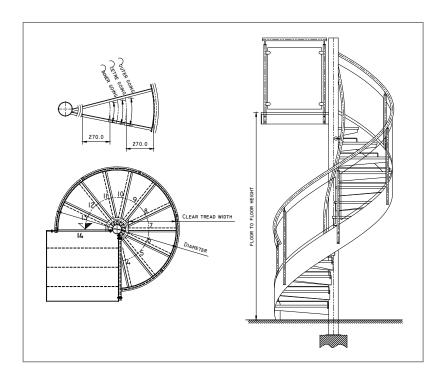

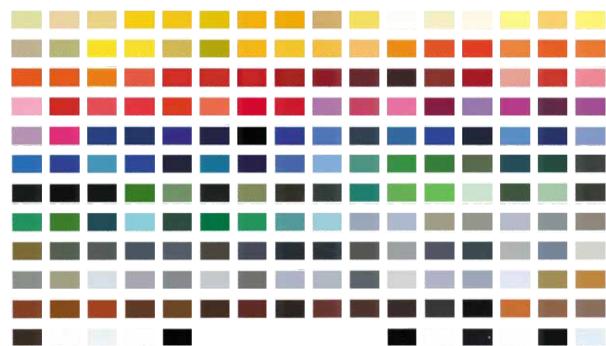

SPIRAL STAIR REGULATIONS

Extract from British Standard BS5395

EXTRACT FROM BS5395 part 2	Minimum Clear Tread Width	Riser Height	Minimum Inner Going	Minimum Centre Going	Maximum Outer Going
Category A – Small Private Stair Secondary domestic stair intended to be used by a limited number of people who are generally familiar with the stair.	600mm - typical minimum diameter 1500mm	170-220mm	120mm	145mm	350mm
Category B – Main Private Stair Similar to category A but also providing the main access to the upper floor of a private dwelling.	800mm - typical minimum diameter 1800mm N.B - 900mm in Scotland	170-220mm	120mm	190mm	350mm
Category C – Small Semi Public Stair Small commercial stair providing access for up to 50 people. Intended to be used by those generally familiar with the stair. Centre column handrail required.	800mm - typical minimum diameter 2000mm	170-220mm	150mm	230mm	350mm



VIEW THE CUSTOM MADE SPIRAL IN OUR SHOWROOM



01794 522444 info@completestairsystems.co.uk

www.completestairsystems.co.uk

Complete Stair Systems Ltd, Unit 15 Belbins Business Park, Cupernham Lane, Romsey, Hampshire, SO51 7JF