



MODEL 71
SPIRAL STAIRCASE



**THE MODEL 71 SPIRAL
STAIRCASE IS A
BESPOKE SPIRAL STAIR,
CONSTRUCTED WITH A
STEEL CENTRE COLUMN
AND TIMBER TREADS.**

It is available in diameters from 1000-2000mm and can span multi levels if required. For strength, the timber treads are always hardwood, with beech, oak, maple, ash and walnut the most popular choices. It is a domestic spiral stair suitable for use as a primary or secondary staircase. Its modern, light and open appearance makes the Model 71 Spiral a real feature within a dwelling.






**MODEL 71
SPIRAL**






**MODEL 71
SPIRAL**



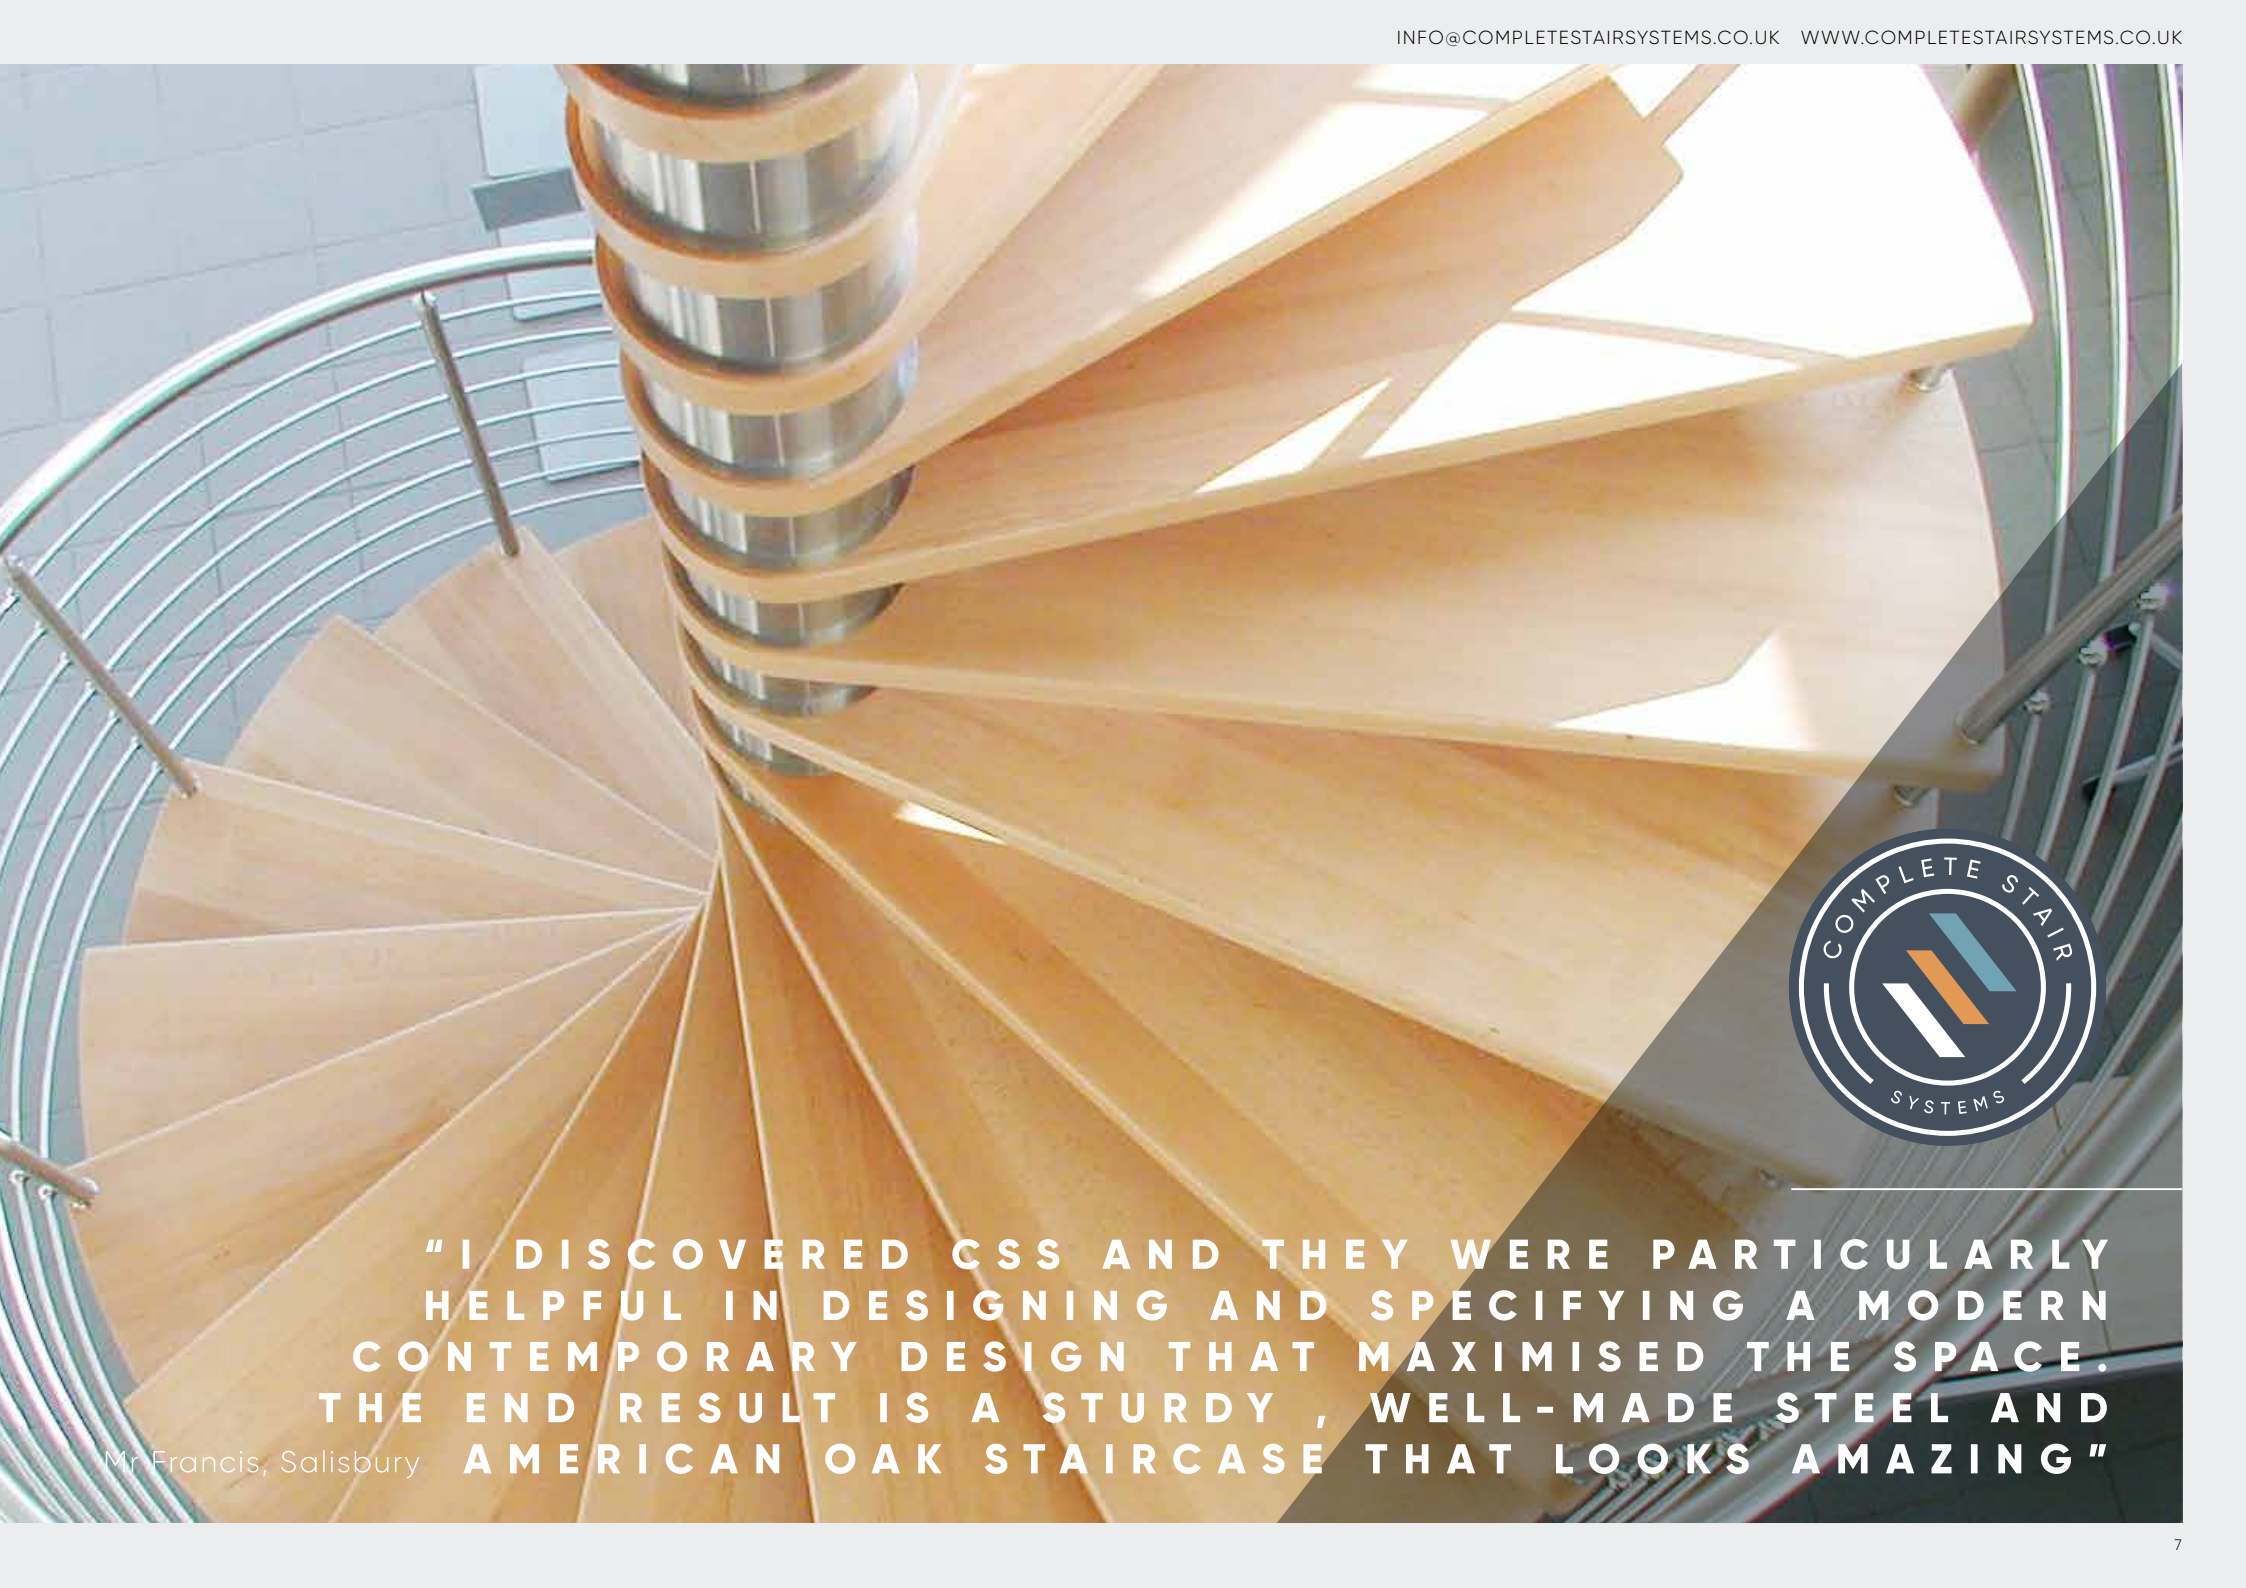

"I DISCOVERED CSS AND THEY WERE PARTICULARLY HELPFUL IN DESIGNING AND SPECIFYING A MODERN CONTEMPORARY DESIGN THAT MAXIMISED THE SPACE. THE END RESULT IS A STURDY , WELL-MADE STEEL AND AMERICAN OAK STAIRCASE THAT LOOKS AMAZING"

Mr Francis, Salisbury

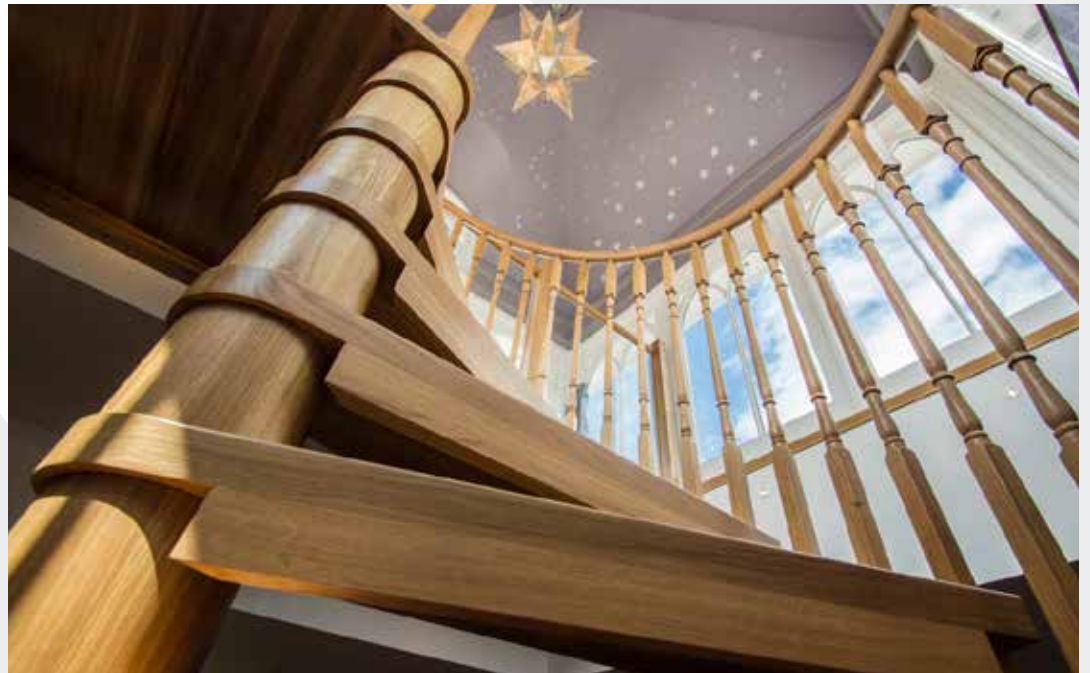



YOUR MODEL 71 CUSTOM MADE SPIRAL STAIRCASE


OBTAINING A QUOTE

The model staircase is custom made so has to be priced on a individual basis. Given the vast range of materials and options and the variants of height and shape we need to know the following information to work out a price.

- Finished floor to floor height?
- Diameter required?
- Your choice of tread?
- Balustrade type?

Please forward any relevant drawings and photos to info@completestairsystems.co.uk

CUSTOM MADE DIAMETERS

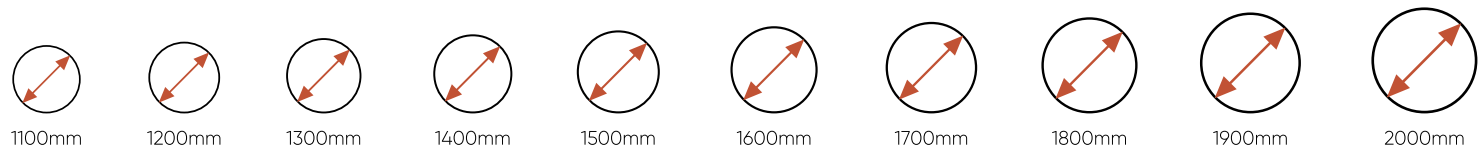

TREAD OPTIONS



Walnut



Oak



Maple



Ash



Beech

HANDRAILS



42mm brushed stainless



42mm powder coated steel



42mm polished stainless steel



50mm timber

CENTRE COLUMN BARRELS



Stainless



Powder coated



Timber

BALUSTRADE INFILLS



Horizontal steel bars



Vertical steel spindles



Vertical timber spindles




Curved acrylic or glass panels

RISER INFILLS



Steel riser bars



Mini acrylic or glass upstand



Timber downstand



Fully closed risers



SPIRAL STAIR REGULATIONS

Extract from British Standard BS5395

EXTRACT FROM BS5395 part 2	Minimum Clear Tread Width	Riser Height	Minimum Inner Going	Minimum Centre Going	Maximum Outer Going
Category A – Small Private Stair Secondary domestic stair intended to be used by a limited number of people who are generally familiar with the stair.	600mm – typical minimum diameter 1500mm	170–220mm	120mm	145mm	350mm
Category B – Main Private Stair Similar to category A but also providing the main access to the upper floor of a private dwelling.	800mm – typical minimum diameter 1800mm N.B – 900mm in Scotland	170–220mm	120mm	190mm	350mm
Category C – Small Semi Public Stair Small commercial stair providing access for up to 50 people. Intended to be used by those generally familiar with the stair. Centre column handrail required.	800mm – typical minimum diameter 2000mm	170–220mm	150mm	230mm	350mm



VIEW THE
MODEL 71
IN OUR
SHOWROOM



0 1 7 9 4 5 2 2 4 4 4

i n f o @ c o m p l e t e s t a i r s y s t e m s . c o . u k

w w w . c o m p l e t e s t a i r s y s t e m s . c o . u k

Complete Stair Systems Ltd, Unit 15 Belbins Business Park, Cupernham Lane, Romsey, Hampshire, SO51 7JF